



BII7010 Series Broadband Hydrophone: Low Power, Low Noise, and Low Frequency.

The directional response patterns are omnidirectional in low frequency range and toroidal in high frequency range. Typical quality factor Q are 2 in useful frequency range. Pulsed sounds reach stable state quickly with short ringing. Custom-fit hydrophones with [low power preamplifiers](#) consume 1 to 2mA which is a great merit for battery-powered portable acoustic system.

These hydrophones provide low cost solutions for field recording, field listening, and acoustic research in laboratory from 0.2Hz to 500 kHz. They come with coax/shielded cables and underwater mateable/BNC/TRS/XLR/DIN/MIL-5015 style connectors, and are ready to be integrated into underwater acoustic systems. They support digital recorders and DAQs (A/D Converter). the output signal can be used for speaker system and headphones.

Small size and broadband of bespoke BII7015 offers benefit for uses in parabolic receivers underwater to achieve the highest pressure gain and the narrowest beam width which are the merits in weak signal detection and searching, directional high speed communication, etc.

Hydrophones with integrated low power preamplifiers and filters are ideal gears to amplify weak underwater sounds and reject ambient noises. Some [preamplifiers](#) can drive cable up to 1000m without significant signal loss. These features allows them to be used in long line arrays (streamers) and large planar arrays.


The smooth dome and small size reduce interferences to acoustic field under test. Hydrophone body possesses streamlined hemispherical domes which minimize the drag force and the hydrodynamic noise caused by the hydrophone in motion or the flow past the hydrophone. They can measure the sound radiations and pressure changes in turbulent processes and flows: surface waves (Wave-height Sensor), turbulences, seismic, ocean traffics, industrial noises, precipitations, biologics, ...

Sound Excitation by Turbulence: $\frac{1}{c^2} \frac{\partial^2 p}{\partial t^2} - \Delta p = \rho \frac{\partial^2 v_i v_k}{\partial x_i \partial x_k}$ v-Velocity of Turbulence Flow; c-Sound Speed in Fluid; p-Pressure; ρ-Fluid Density; x-Position.

Typical Applications

Towed/Dipping Hydrophone, Sonobuoy. LBL, SBL, USBL Positioning, Communication. Underwater Parabolic Antennas. Reference Hydrophone, Noise Measurement. Signal detection in strong currents.	Detection of Ultrasonic Cavitation Noise, Thermoacoustics in Gas. Passive Acoustic Monitoring (PAM System). Linear and Planar Array Element, Vector Hydrophone Element. Marine Bioacoustics, Phantom-power Hydrophone, Sound Recording. Studies of Ocean Turbulence and Flow, Marine Hydrodynamics.
---	---

Underwater Sound Listening, Recording, and Communication

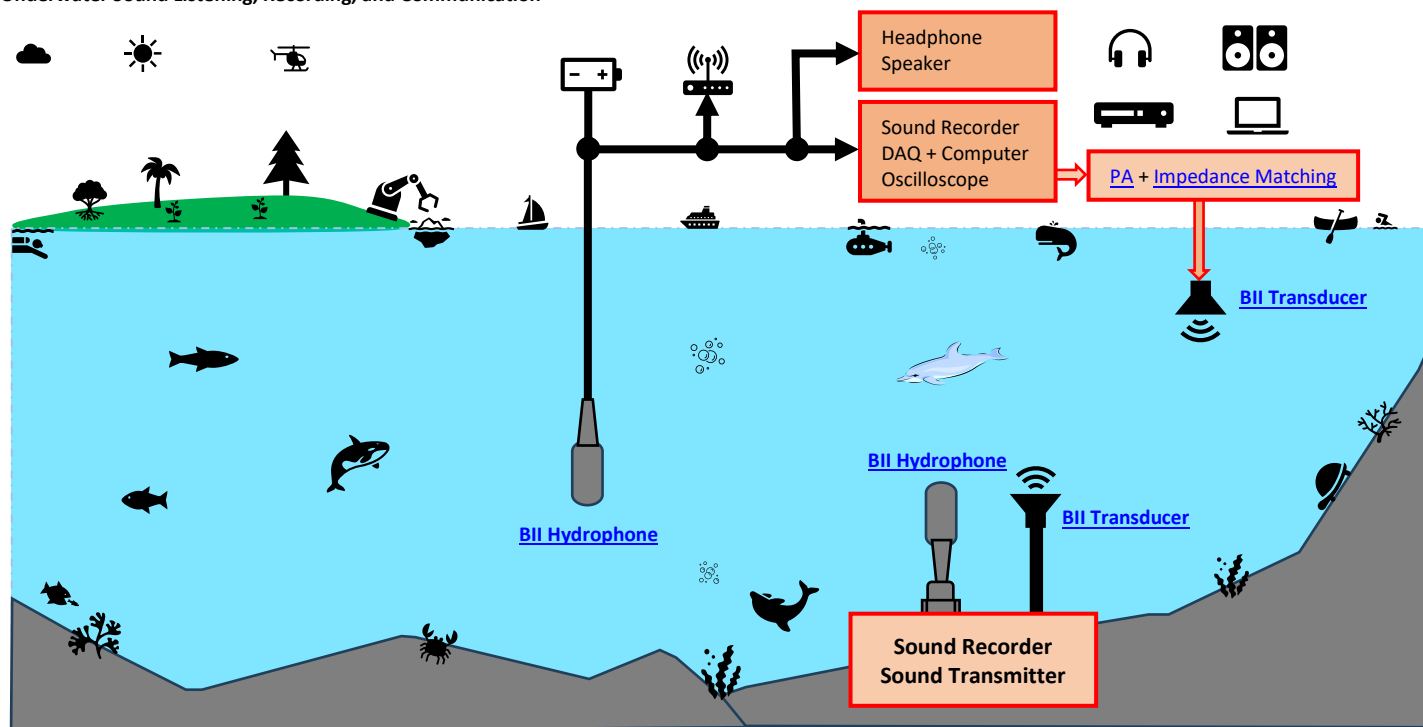

Typical Applications

Underwater Sounds Recording, Listening, and Communication, Noise Measurement, Marine Bioacoustics, Passive Acoustic Monitoring (PAM System).
Coastal/Offshore Processes, Engineering & Management, Wave-Structure Interaction, Wave-height Sensor, Wave and Tide Recorder/Logger.
Surface Waves, Ocean Turbulences, Hydrodynamics, Marine Geophysics, Battery-Powered Instruments: Sonobuoy, Recorder, Transponder, Acoustic Release...

Questions

How do I set up my professional sound recorders to work with BII Hydrophones?


1. BII hydrophones have their own DC power supply to support Line Input of recorders, and Do NOT use phantom power 48V which may destroy the hydrophones.
2. Maximum Input Level (Line Input) of recorders should be large enough to avoid saturation or clipping during recording.
Equivalent Input Noise of recorders should be low enough for the recorders to be sensitive to weak signal of the interest.
3. Sampling Rate of the recorder should be fast enough to avoid missing high frequency sound of the interest. Generally, the Sampling Rate should be at least two times greater than the maximum frequency of sound.

4. Calculate the memory size of data storage according to sampling rate, resolution, sampling channels, and recording time, and use suitable recording media.
5. Calculate battery service life according to battery power and consuming current.
6. When the cable is greater than 5m, balanced signal or differential signal is recommended to be in use over the cable.

How do I playback the recorded sounds in water?

System Setup: Recorder (Recorded Sounds) with Line or Phone Output -> [Audio Power Amplifiers](#) -> [Impedance Matching Device](#) -> [Transducers \(Projectors\)](#).

System Configuration of Receiving Sounds and Waves.

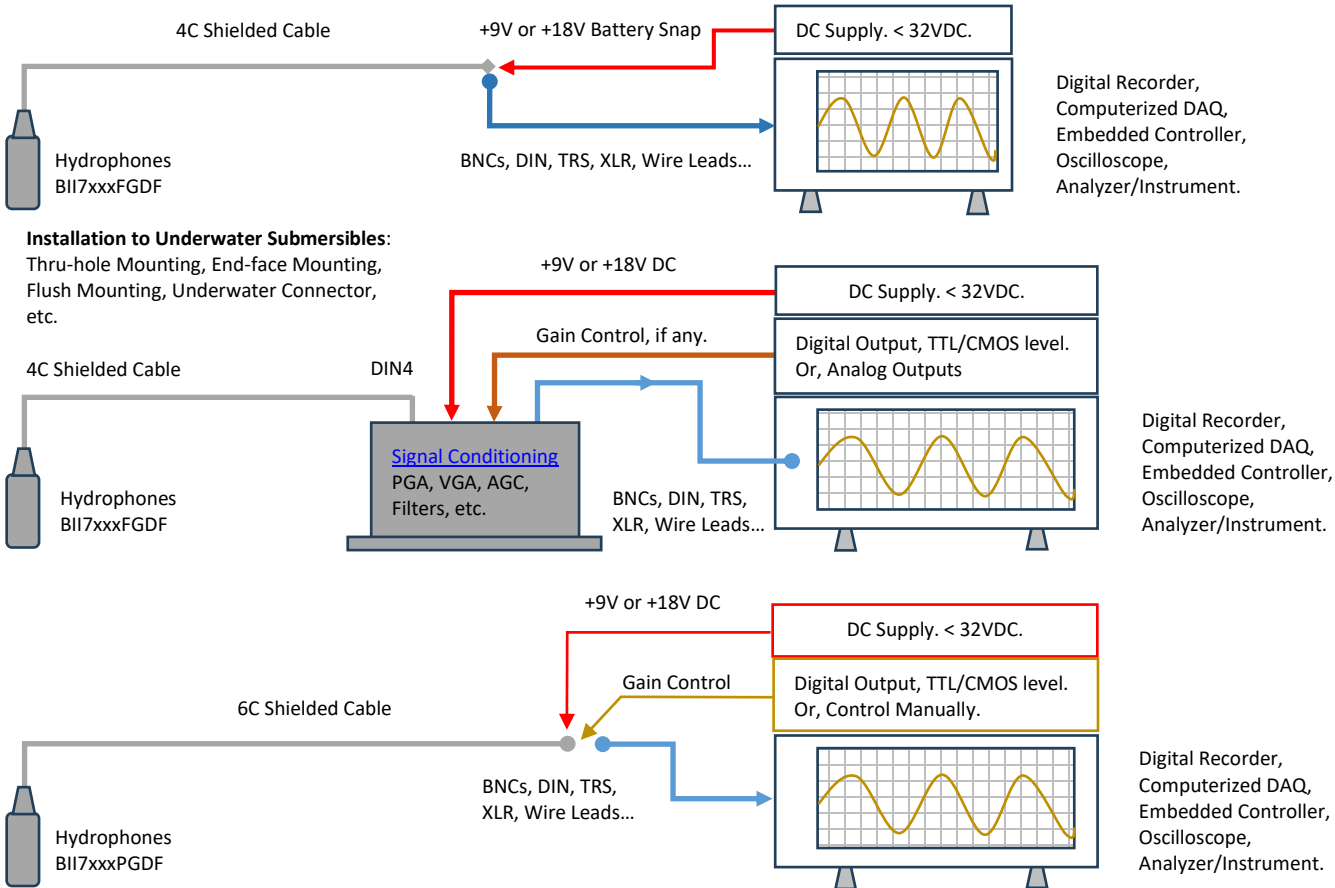

Specification

The hydrophone is tested in water unless stated otherwise.			
FG: Fixed Gain; PG: Programmable Gain; DF: Differential Output; SE: Single Ended Output; BPF: Band Pass Filter; HPF: High Pass Filter; LPF: Low Pass Filter.			
Part Number:	BII7013FGDF	BII7013FGSE	BII7013PGDF
Sensitivity @ 1 kHz:	-200.0 + Preamp Gain, ± 2 dB V/ μ Pa. -160.0 dB V/ μ Pa.	-170.0 dB V/ μ Pa.	-180.0 and -150.0 dB V/ μ Pa.
Sensitivity Matching: (at 1 kHz)	When hydrophones are used as array elements, it is necessary for array elements to possess uniform sensitivities. Available Options of Sensitivity Tolerance: a. ± 2.0 (Default); b. ± 1.0 ; c. ± 0.5 ; d. ± 0.3 ; e. ± 0.1 ; in dB V/ μ Pa. 1. Sensitivity is tested at 1 kHz in water. 2. Hydrophones whose sensitivity variations are out of specified tolerance are rejected.		
FFVS:	Refer to Graph of FFVS vs. Frequency . Free-field Voltage Sensitivity.		
Pressure Noise Density:	Refer to Graph of Pressure Noise Density , Referred to Input (RTI), in μ Pa/VHz.		
Built-in Filters: at -3dB V/ μ Pa.	Bespoke HPF.	Bespoke BPF.	Bespoke HPF, or BPF.
	Minimum HPF: 0.5 Hz.	Minimum HPF: 1.0 Hz.	Minimum HPF: 2.5 Hz.
	in Water: 0.5 Hz ~ 160 kHz	in Water: 10 Hz ~ 160 kHz	in Water: 2.5 Hz ~ 160 kHz
	in Air: 0.5 Hz ~ 9 kHz	in Air: 10 Hz ~ 9 kHz	in Air: 2.5 Hz ~ 9 kHz
	1. Reduce Noise. Both ocean ambient noises and the self-noises of electronic devices decrease when frequency increases. It is recommended to choose a built-in high pass filter to reject noises in low frequency range. For example, if you are interested in the signals greater than 1 kHz, you may specify a high pass filter with -3dB cut-off frequency at 100 Hz to improve signal to noise ratio of the signals of the interest. 2. Avoid Saturation. When there are strong low frequency noises, disturbances, and/or vibrations, resulting from rough surface waves and/or mechanical movements of the platform, it is recommended to specify a high pass filter to avoid hydrophone saturation in these low frequency ranges.		
Preamp Gain (dB):	40 dB.	30 dB.	20 and 50 dB
Bespoke Preamp:	Low Power Fixed Gain Preamp.	BII1067 Low Power Fixed Gain Preamp	Low Noise Programmable Gain Preamp.
Buyer may specify a specific preamp to be used in the hydrophone to fit the project better.			
Gain Selection Voltage:	N/A	N/A	CMOS/TTL Compatible Logic Low 0: Gain Selection Wire to COM or 0 to +0.8 VDC.

			Logic High 1: Gain Selection Wire Open or +2.4 VDC to V _s .
Directivity Pattern:	Omnidirectional and Toroidal. Refer to Graph of Directivity Response Pattern .		
Side Lobe Level:	No side lobes.		
Signal Output Type:	Differential.	Single-ended	Differential.
	Differential signal has better capability to reduce and reject EMI noise, especially over long cable.		
Maximum Output V _{omax} :	Supply Voltage V _s – 4.6, in Vpp.	Supply Voltage V _s – 0.7, in Vpp.	Supply Voltage V _s – 1.2, in Vpp.
Overload Pressure Level:	20*log(V _{omax} /2.828) – Sensitivity, in dB μPa. Refer to the chart of Overload Pressure Level (OPL).		
Acceleration Sensitivity:	106.4 dBμPa/(m/s ²) at Acoustic Axis or XZ Direction.		
	≤ 75.0 dBμPa/(m/s ²) at Horizontal or XY Direction.		
Operating Depth:	Maximum 300 m or 3 MPa pressure and limited by the cable length if the cable has wire leads or a non-waterproof connector.		
Mounting Options:	1. Default: Free Hanging (FH).		
	2. Free-hanging with Male Underwater Connector (FHUWC-3P, FHUWC-4P, FHUWC-6P).		
	3. Thru-hole Inch Mounting with Single O-ring Sealing (THM-7/16").		
	4. Thru-hole Inch Mounting with Double O-ring Sealing (THDO-7/16").		
	5. Bolt Fastening Mounting (Plastics) (BFMP-NPT3/8").		
	6. Bolt Fastening Mounting (Stainless Steel) (BFM-7/16", BFM-5/8").		
	Please refer to online document AcousticSystem.pdf for a complete list of Mounting Options and more details.		
Cable Options:	Four Conductor Shielded Cable (SC)	Four Conductor Shielded Cable (SC)	Six Conductor Shielded Cable (SC)
Cable Orientation:	1. Default: Perpendicular to end face of hydrophone.		
	2. Customization: Perpendicular to side wall of hydrophone (Generally, this is used to reduce the overall length of hydrophone), Appending SW to the part number.		
Cable Length:	1. Default: 20m (65.6ft) for Non-Underwater Connector; 0.6m (2ft) for Underwater Connectors.		
	2. Custom-fit Cable Length up to 305 m, Refer to Capability of Driving Cable .		
Connector:	1. Default: Wire Leads (WL)		
	2. Two Male BNCs (BNC) (Max. Diameter Φ14.3 mm) for Output+ and Output- Signals.		
	3. DIN Receptacle with 3 Male Pins (DIN3), (Max. Diameter Φ17 mm).		
	DIN Receptacle with 4 Male Pins (DIN4), (Max. Diameter Φ17 mm).		
	DIN Receptacle with 6 Male Pins (DIN6), (Max. Diameter Φ17 mm).		
	4. 1/8" (3.5mm) TRS Plug (TRS) (Max. Diameter Φ10.5 mm).		
	5. XLR Receptacle with 3 Male Pins (XLR3), (Max. Diameter Φ20.2 mm).		
	XLR Receptacle with 4 Male Pins (XLR4), (Max. Diameter Φ20.2 mm).		
	XLR Receptacle with 6 Male Pins (XLR6), (Max. Diameter Φ20.2 mm).		
	6. Underwater Mateable Connector (3 pins) (UMC3P) (Max. Diameter Φ21.5 to Φ35 mm).		
	Underwater Mateable Connector (4 pins) (UMC4P) (Max. Diameter Φ21.5 to Φ35 mm).		
	Underwater Mateable Connector (6 pins) (UMC6P) (Max. Diameter Φ21.5 to Φ35 mm).		
	UMC is from global manufacturers of underwater connectors. Its part number is listed in quote in detail.		
	7. +9VDC Battery Snap (BS), for +9VDC or +18VDC power supply.		
	8. 4mm Banana Plug Pair (Red and Black Color) (BP), for DC power supply ONLY.		
	Underwater Mateable Connectors are for underwater uses. Other connectors/wire leads are for dry uses and are not waterproofed.		
1. BNC: "Bayonet Neill–Concelman" is a miniature quick connect/disconnect radio/audio frequency connector used for coaxial cable. Fastening Type: Bayonet Lock.			
2. 3.5mm TRS stand for Tip, Ring, and Sleeve, miniature, quick connect/disconnect, audio frequency connector used for shielded cable. Fastening Type: None.			
3. DIN: Electrical cylindrical connectors, 3 to 14 contacts, Φ20mm diameter, used for audio, RF, digital, and DC or AC power signals. Fastening Type: Threaded.			
4. XLR: Employed for balanced audio and DC or AC power signal interconnections, 3 to 7 contacts. Fastening Type: Latch Lock.			
Supply Voltage V _s :	+8.5 to +32 VDC	+3.4 to +32 VDC	+9 to +32 VDC
Suggested DC Supply:	+9VDC Battery, Marine Battery, Automobile Battery, Fixed DC Linear Power Supply, Not Included. DO NOT use variable power supply whose maximum supply voltage is higher than the rated voltage. DO NOT use switching mode DC power supply.		
Current (Quiescent):	6.8 mA	1.55 mA	19.5 mA
Size:	Free Hanging: ΦD = Φ21 mm, Overall Length ≈ 90 to 100 mm.		
	Other Mounting Types: actual length depends on Mounting Parts.		
Weight:	≥ 1.0 kg with 20m cable.		
	Actual weight depends on Mounting Parts, Cable Types and Length.		
Operation Temperature:	-10 °C to +60 °C or 14 °F to 140 °F.		
Storage Temperature:	-20 °C to +60 °C or -4 °F to 140 °F.		
Array Design Service:	Line (Linear) Array, Rectangular Planar Array, and Circular Planar Array design: Side Lobe Level SLL , -3dB Beam Angle θ_{-3dB} ; Array Element Spacing d ; Array Element Number N ; Beam Steering, FFVS loss, and mutual effects among these parameters.		
Sound Measurement in Air:	The hydrophones can be used to detect sounds in air. The sensitivity in air is same to the one in water in low frequency range.		

How to Order Standard Hydrophones. BII Keeps Standard Products in Stock.

FG: Fixed Gain; PG: Programmable Gain; DF: Differential Output; BPF: Band Pass Filter; HPF: High Pass Filter; LPF: Low Pass Filter.					
Part Number	-Preamp Gain	-HPF Filter	-Mounting	-Cable Length	-Connectors for Signal/Gain Selection/DC Supply
BII7013FGDF	40 dB.	0.5 Hz.	FH: Free Hanging.	20 m (65.6 ft) 0.6m (2 ft)	Connectors for Signals, Gain Selection, and DC Supply.
BII7013FGSE	30 dB.	10 Hz.			
BII7013PGDF	20/50 dB.	2.5 Hz.			
Example of Part Number:		Description			
BII7013FGDF-40dB-0.5Hz-FH-20m-WL		BII7013FGDF Hydrophone, 40dB Gain, High Pass Filter: 0.5Hz, Free Hanging, 20m Shielded Cable, Connector: None, Wire leads.			
BII7013FGDF-40dB-0.5Hz-FH-20m-BNC/BS		BII7013FGDF Hydrophone, 40dB Gain, High Pass Filter: 0.5Hz, Free Hanging, 20m Shielded Cable, Connector: Two BNC Male for Output+ and Output- Signals. 9V Battery Snaps for DC Supply.			

BII7013FGDF-40dB-0.5Hz-FH-20m-XLR3/BS	BII7013FGDF Hydrophone, 40dB Gain, High Pass Filter: 0.5Hz, Free Hanging, 20m Shielded Cable, Connector: XLR3 for Signal, 9V Battery Snaps for DC Supply.
BII7013FGDF-40dB-0.5Hz-FH-20m-XLR4	BII7013FGDF Hydrophone, 40dB Gain, High Pass Filter: 0.5Hz, Free Hanging, 20m Shielded Cable, Connector: XLR4 for Signals and DC Power Supply.
BII7013FGSE-30dB-10Hz-FHUWC-3P	BII7013FGSE Hydrophone, 30dB Gain, High Pass Filter: 10Hz, Connector: FHUWC-3P.
BII7013FGSE-30dB-10Hz-FH-0.6m-UWC3P	BII7013FGSE Hydrophone, 30dB Gain, High Pass Filter: 10Hz, Free Hanging, 0.6m Cable, Connector: UWC3P.
BII7013PGDF-20/50dB-2.5Hz-FH-20m-WL	BII7013PGDF Hydrophone, 20/50dB Gain, High Pass Filter: 2.5Hz, Free Hanging, 20m Shielded Cable, Connector: None, Wire leads.
BII7013PGDF-20/50dB-2.5Hz-FH-20m-XLR3/WL/BS	BII7013PGDF Hydrophone, 20/50dB Gain, High Pass Filter: 2.5Hz, Free Hanging, 20m Shielded Cable, Connector: XLR3 for Signal, Wire Leads for Gain Selection, 9V Battery Snaps for DC Supply.
BII7013PGDF-20/50dB-2.5Hz-FH-20m-XLR6	BII7013PGDF Hydrophone, 20/50dB Gain, High Pass Filter: 2.5Hz, Free Hanging, 20m Shielded Cable, Connector: XLR6 for Signals, Gain Selection, and DC Power Supply.

How to Order Bespoke Hydrophones. Non-stock.

FG: Fixed Gain; PG: Programmable Gain; DF: Differential Output; SE: Single Ended Output; BPF: Band Pass Filter; HPF: High Pass Filter; LPF: Low Pass Filter.					
Part Number	-Preamp Gain	-HPF or HPF/LPF	-Mounting	-Cable Length	-Connectors for Signal/Gain Selection/DC Supply
BII7013FGDF	40 dB.	-3dB HPF, in Hz, kHz.	Mounting Options.	in meter. Up to 305m (1000 ft).	Connectors for Signals, Gain Selection, and DC Supply.
BII7013FGSE	30 dB.	-3dB HPF/LPF, in Hz, kHz			
BII7013PGDF	20/50dB	-3dB HPF/LPF, in Hz, kHz.			
Example of Part Number:		Description			
BII7013FGDF-40dB-10Hz-FH-30m-WL		BII7013FGDF Hydrophone, 40dB Gain, Highpass Filter: 10Hz, Free Hanging, 30m Shielded Cable, Connector: none, Wire leads.			
BII7013FGDF-40dB-2kHz-FH-30m-BNC/BS		BII7013FGDF Hydrophone, 40dB Gain, High Pass Filter: 2kHz, Free Hanging, 30m Shielded Cable, Connector: Two BNC Male for Output+ and Output- Signals, 9V Battery Snaps for DC Supply.			
BII7013FGDF-40dB-100Hz-BFM-7/16"-100m-XLR3/BS		BII7013FGDF Hydrophone, 40dB Gain, High Pass Filter: 100Hz, Bolt Fastening Mounting BFM-7/16", 100m Shielded Cable, Connector: 3-pin XLR for Signals and Battery Snap for +9VDC Batteries.			
BII7013FGDF-40dB-10Hz-FH-0.6m-UMC4P		BII7013FGDF Hydrophone, 40dB Gain, High Pass Filter: 10Hz, Free Hanging, 0.6m Shielded Cable, Connector: 4-pin Underwater Mateable Connector for Signals and DC Power Supply.			
BII7013FGSE-20dB-1Hz-FHUWC-3P		BII7013FGSE Hydrophone, 20dB Gain, High Pass Filter: 1Hz, Connector: FHUWC-3P.			
BII7013PGDF-20/50dB-10Hz/100kHz-FH-30m-WL		BII7013PGDF Hydrophone, 20/50dB Gain, Bandpass Filter: 10Hz to 100kHz, Free Hanging, 30m Shielded Cable, Connector: none, Wire leads.			
BII7013PGDF-20/50dB-1kHz-BFM-7/16"-100m-XLR3/WL/BS		BII7013PGDF Hydrophone, 20/50dB Gain, High Pass Filter: 1kHz, Bolt Fastening Mounting BFM-7/16", 100m Shielded Cable, Connector: 3-pin XLR for Signals, Wire Leads for Gain Selection, and Battery Snap for +9VDC Batteries.			
BII7013PGDF-20/50dB-10Hz-FH-0.6m-UMC6P		BII7013PGDF Hydrophone, 20/50dB Gain, High Pass Filter: 10Hz, Free Hanging, 0.6m Shielded Cable, Connector: 6-pin Underwater Mateable Connector for Signals, Gain Selection, and DC Power Supply.			

Wiring Information of BII7013FGDF Hydrophones with Fixed-gain Preamps:

Differential Output:	Wire Leads	UMC4P/XLR4P	DIN4P	DIN3/XLR3 + 9V BS	BNC + 9V BS	TRS + 9V BS
+VDC	Red	Pin 3	Pin 4	Battery Female Snap	Battery Female Snap	Battery Female Snap
Common	Black	Pin 1	Pin 1	Battery Male Snap	Battery Male Snap	Battery Male Snap
Signal+	White	Pin 2	Pin 3	DIN3 Pin 3 TRS Tip	#1 BNC Center	TRS Tip
Signal-	Blue, Green, or Yellow	Pin 4	Pin 2	DIN3 Pin 1 TRS Ring	#2 BNC Center	TRS Ring
Signal Common	Black	Pin 1	Pin 1	DIN3 Pin 2 TRS Sleeve	BNC Shell	TRS Sleeve
Shielding	Shield	Metal Shell	Metal Shell	DIN3 and XLR3 Metal Shell	N/A	N/A

Wiring Information of BII7013FGSE Hydrophones with Fixed-gain Preamps:

Single-ended Output	Wire Leads	UMC4P/XLR4P	DIN4P	UMC3P/FHUMC-3P	BNC + 9V BS
+VDC	Red	Pin 3	Pin 4	Pin 1	Battery Female Snap
Common	Black	Pin 1	Pin 1	Pin 2	Battery Male Snap
Signal	White	Pin 2	Pin 3	Pin 3	BNC Center
Signal Common	Blue, Green, or Yellow	Pin 4	Pin 2	Pin 2	BNC Shell
Shielding	Shield	Metal Shell	Metal Shell	N/A	N/A

Wiring Information of BII7013PGDF Hydrophones with One-Bit-Word Programmable Gain Preamps:


Differential Output:	Wire Leads	UMC6P/XLR6	DIN6	BNC + 9V BS	DIN3/XLR3 + 9V BS	TRS + 9V BS
+VDC	Red	Pin 3	Pin 4	Battery Female Snap	Battery Female Snap	Battery Female Snap
Common	Black	Pin 1	Pin 1	Battery Male Snap, BNC Shield.	Battery Male Snap, DIN Pin 2 or XLR Pin 1.	Battery Male Snap, TRS Sleeve.
Output Signal+	White	Pin 2	Pin 3	"1" BNC Center Pin	DIN Pin 3 XLR Pin 2	TRS Tip
Output Signal -	Green	Pin 4	Pin 2	"2" BNC Center Pin	DIN Pin 1 XLR Pin 3	TRS Ring
Digital A0	Blue	Pin 6	Pin 5	Blue	Blue	Blue
Digital Common	Yellow or Brown	Pin 5	Pin 6	Yellow or Brown	Yellow or Brown	Yellow or Brown
Shielding	Shield	Metal Shell	Metal Shell	BNC Shield	Metal Shell	N/A

Selecting Sensitivity of One-bit Digitally Programmable

FFVS Selection Wire A0	Hydrophone Sensitivity FFVS at 1kHz.
0 (Logic Low)	-200.0 + 20 dB V/μPa.
1 (Logic High)	-200.0 + 50 dB V/μPa.


Physical Size (Dimensional Unit: mm): The overall length varies with the length of the built-in preamplifier and mounting parts.

1. Free Hanging with Smooth Domes.

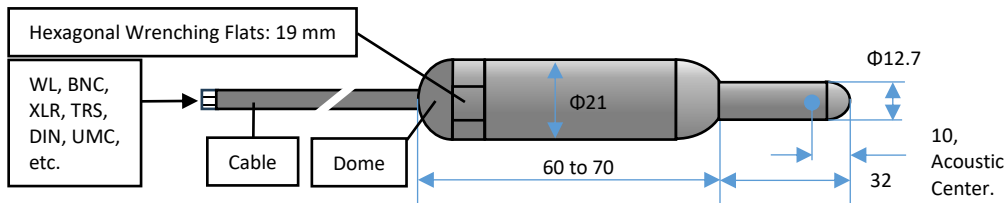


The hydrophone body has streamlined hemispherical domes which minimize the drag forces and the hydrodynamic noise caused by the hydrophone in motion or the flow past the hydrophone.


2. Bolt-Fastening Mounting BFM-NPT3/8", 3/8" NPT Thread Length: 15mm. Nut Height: 5mm. Tips: Plastic material has less sound reflection.

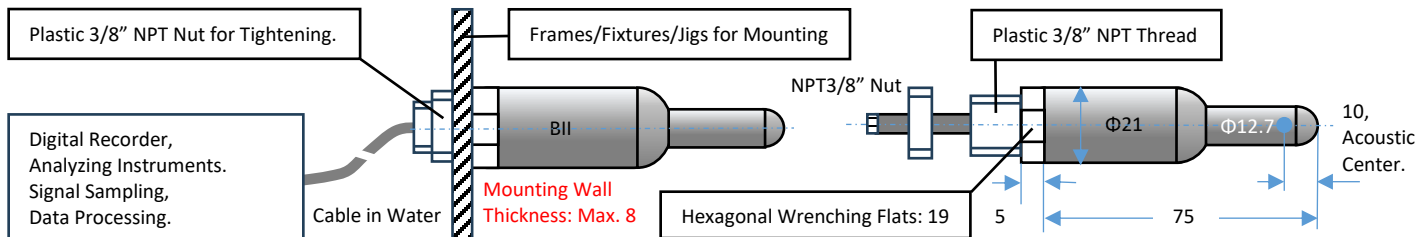

3. Bolt-Fastening Mounting BFM-7/16" (7/16"-20x22 UNF-2A), and BFM-5/8" (5/8"-18x22 UNF-2A, BFM-5/8" does NOT possess Hexagonal Wrenching Flats.).


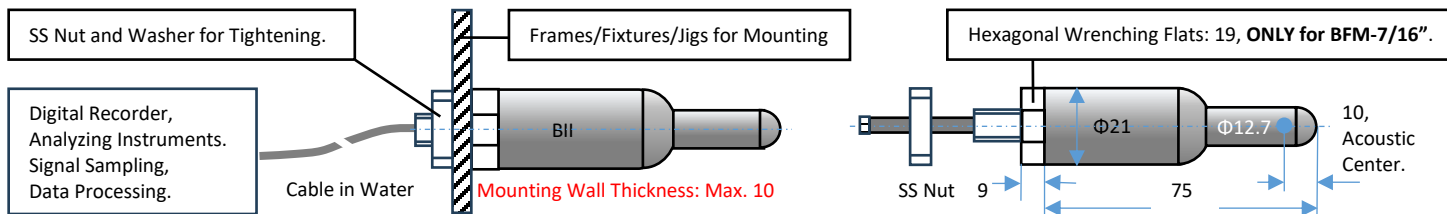


4. Thru-hole Mounting (Inch Thread) with Single O-ring Sealing THM-7/16" (7/16"-20x22 UNF-2A).

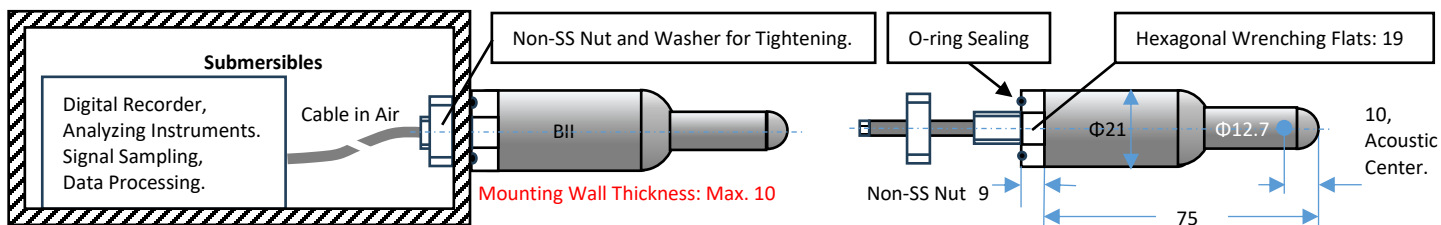


5. Free-hanging with Underwater Connector FHUWC-4P, 4 Pins (Fixed Sensitivity); FHUWC-6P, 6 Pins (Programmable Sensitivity).

Mating Connector and Cable	UWC-Cable Length-Connector: Underwater Connector with Socket insert and Internal-Thread Mating Parts, customized-length shielded cable, a Connector (WL, XLR, TRS, DIN, MIL, UMC, etc.) to DAQ devices or Digital Recorders.
	How to order cable with mating underwater connector? for example:
	UMC4S-20m-WL: 20 m cable with Underwater Mateable Connector 4 Sockets (UMC4S) on one end and wire leads (WL) on other end. UMC4S-20m-XLR3/BS: 20 m cable with and Underwater Mateable Connector 4 Sockets (UMC4S) on one end and XLR Receptacle with 3 Male Pins (XLR3) and Two +9V Battery Snaps on other end.

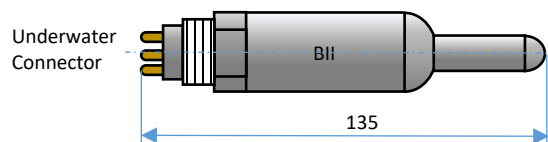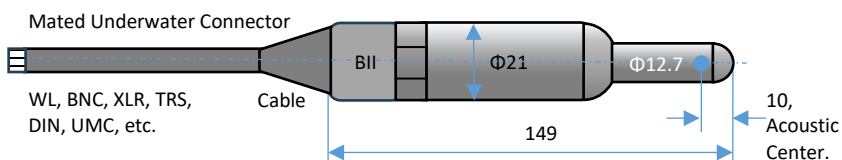


6. More Mounting/Installation Options: Please refer to online document [AcousticSystem.pdf](#) for a complete list of Mounting Options and details.

7. Array Element: Free Hanging with Smooth Domes for an Linear Discrete Array. Illustration Only, Size Scale is NOT 1:1.

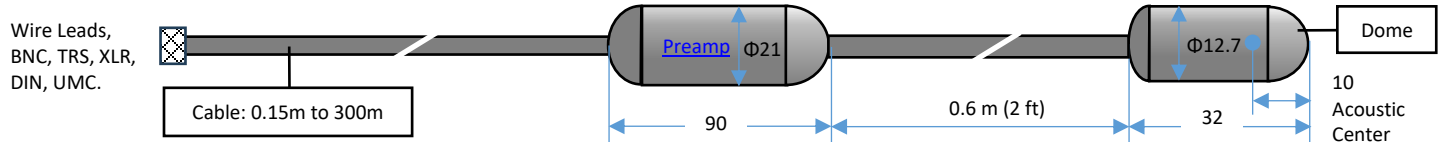


The streamlined hemispherical domes minimize drag forces and hydrodynamic noises caused by the hydrophone in motion or the flow past the hydrophone.


Free-field Voltage Response (FFVS):

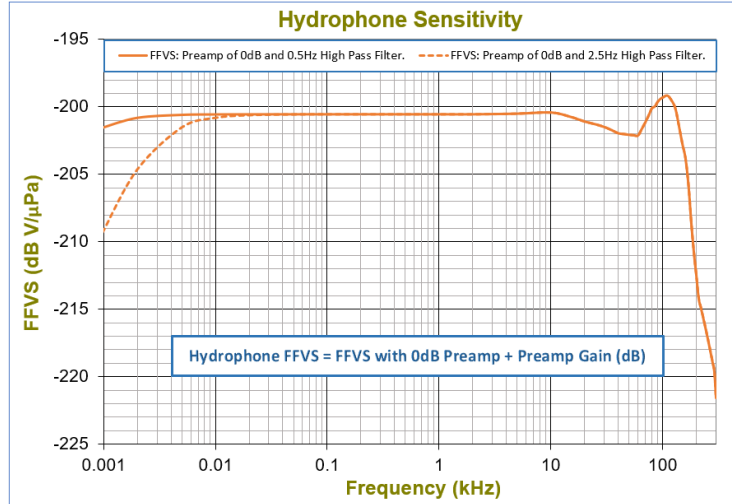


Pressure Noise Density (RTI, referred to the input):

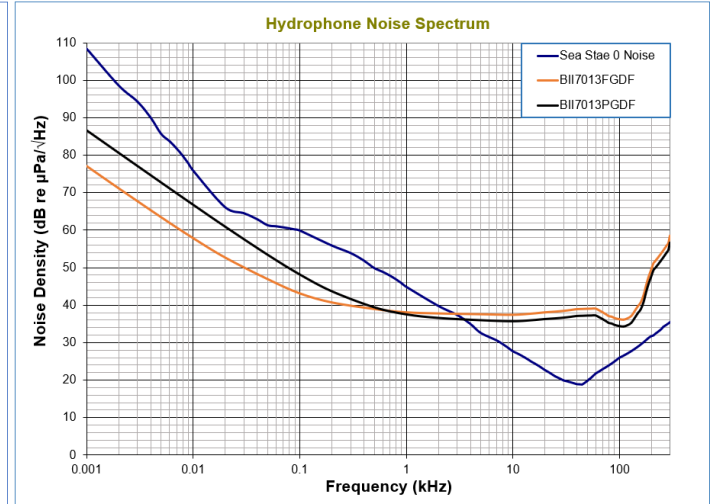



Overload Pressure Level (OPL), LS: Low Sensitivity, HS: High Sensitivity.

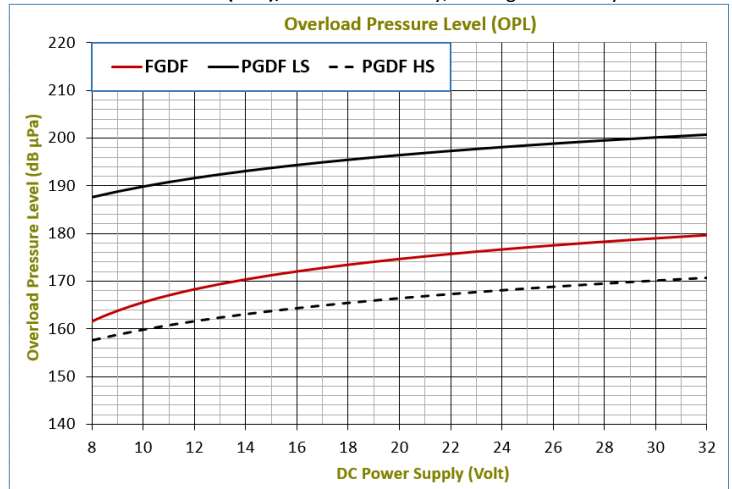



Hydrophone Cable Length

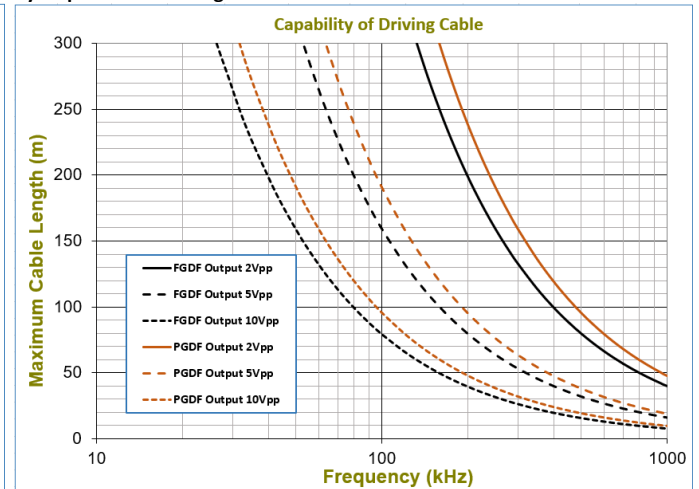

Directivity Response Pattern

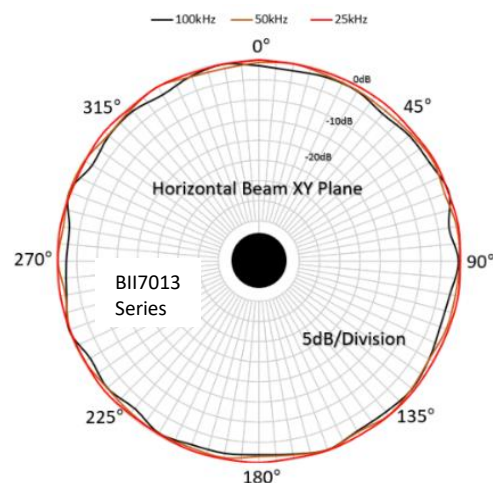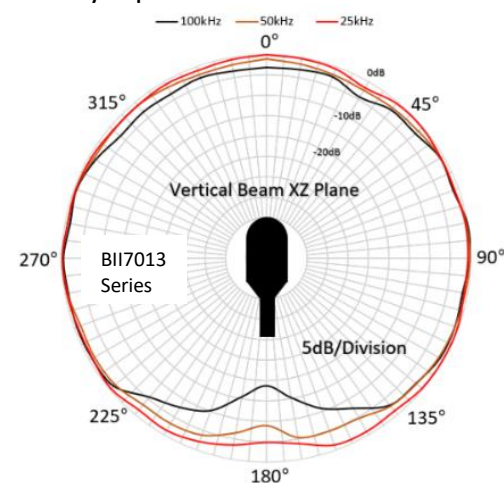

Bespoke Low Power Hydrophones for Long Terms Deployments of Underwater Recorder: BII7013FGSE-36dB-10Hz-FH-50m-SC-UMC3P.

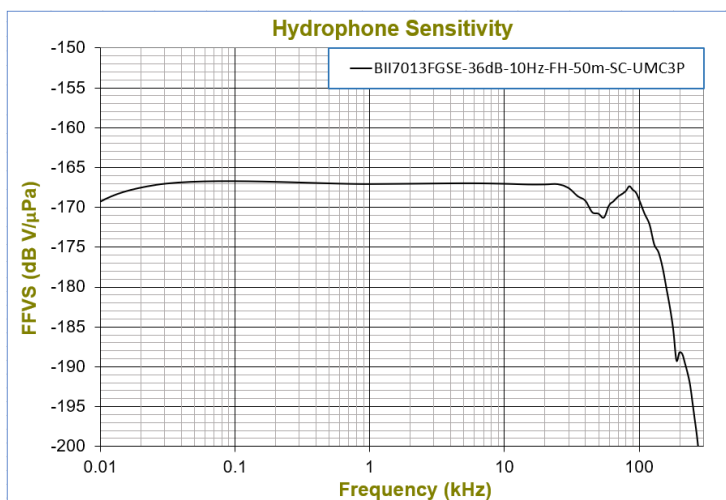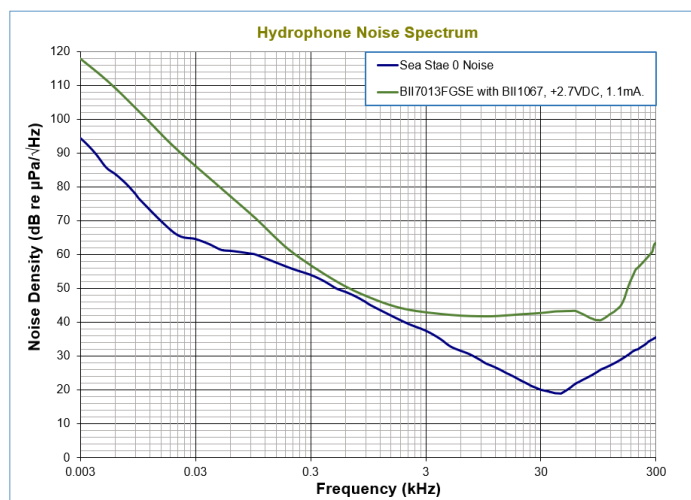

Question:

What if the mating connector of my DAQ module or recording device is NOT available from BII? A bespoke connector adaptor might be assembled by BII and BII ships the adaptor to buyer as accessory of the device. Please contact BII for customizations. Many adaptors for standard connectors are available in worldwide electronic suppliers such as BNC to SMA, BNC to SMC, XLR to TRS, etc. Check out your local suppliers.

Is impedance matching necessary between hydrophones/sensors and preamplifiers/Recorders/Analyzers? It is NOT necessary to do impedance matching in low frequency range applications in which electromagnetic wave lengths are much greater than the cable length. High frequency transducers such as NDT pulsing transducers need 50Ω impedance matching among transducers, cables, and analyzers/digitizers.

My acoustic sensors generate differential signals in MHz range, are TRS connectors suitable for my applications? BII's test shows TRS connectors (Plug and Jack) of BII preamps can be used up to 20 MHz. Test Conditions: TRS Jack with 0.2m cable and TRS plug with 1m cable. Oscilloscope: 1MΩ | 20pF, Signal Source: DDS Signal Generator.

Can 3.5mm (1/8") TRS be configured for single-ended signal of a hydrophone/transducer which does not have built-in preamplifier? Yes, the preamp with differential-input TRS can accept single-ended signals from hydrophones/transducers whose TRS wiring should be like followings: **TRS Tip:** Signal. **TRS Ring and Sleeve:** Both terminals are soldered together for Signal Common and Shielding. Common and shielding should be "one-point" contact.

Can BII explain why the capacitance of my hydrophone/transducer affect high pass filtering? (1). Hydrophone/transducer is high impedance devices in low frequency range. Its simplified complex impedance = $j/(2\pi f C_h)$, C_h is the capacitance of hydrophone/transducer, f is frequency in Hz. This impedance is in series with preamp R_i and can reach several MΩ to hundreds MΩ depending on C_h and f . (2). Most high-performance operational amplifiers (IC chips) can use input resistors R_i up to 1 to 200 MΩ to avoid bumping into saturation issue.

Can the hydrophone with differential outputs be wired to single-ended inputs of a DAQ device (Data Acquisition Equipment) such as an Oscilloscope? Yes, output+ and Common of a BII hydrophone can be used a single-ended signal, or Output- and Common of the hydrophone can be used a single-ended signal.

(1) The terminal of unused output **MUST** be insulated to avoid short circuit.

(2) Neither output+ nor output- of the hydrophone can be wired to common which is going to destroy the hydrophone by short circuit.

How do I use a programmable sensitivity hydrophone as a fixed sensitivity hydrophone?

When a **Gain Selection wire** is short to **Digital Common**, its digital logic is Low or "0". The gain of the built-in preamp is set to low gain such as 30dB.

When a **Gain Selection wire** is floating or open, its digital logic is High or "1". The gain of the built-in preamp is set to high gain such as 60dB.

The unused terminals and bare splice wire leads **MUST** be insulated to avoid short circuit.

What if the connector of my analyzer (instrument) is SMA or SMC Connector? Buyer may order a SMA (or SMC) to BNC (Male) adaptor from local electronic distributors in buyer's country. BII may ship the adaptor as accessory of the device if buyer requests when ordering. **By default, BII does NOT supply the adaptor as accessories.**

How to increase hydrophone sensitivity for extremely weak sounds?

BII low noise hydrophone with built-in preamp (Differential Output) -> Long Cable -> Standalone Preamp -> Analyzing Instrument or Recorder.

What components are necessary to compensate the propagation and spreading loss?

A low noise hydrophone + **PGA** amplifier with gain of 0/20/40/60 dB.

A low noise hydrophone + **VGA** amplifier with gain of 0 ~ 70 dB.

A low noise hydrophone + **AGC** amplifier with gain of -20 ~ 80dB.

How do I use Gain Selection wires of a programmable sensitivity hydrophone in field?

(1). **Manual Gain Selection.**


When a **Gain Selection wire** is floating or open, its digital logic is High or "1". When a **Gain Selection wire** is short to **Digital Common**, its digital logic is Low or "0".

Sensitivity of a Hydrophone is fixed when its Gain Selection wires are fixed to **Digital Common** or open (floating) during operation.

(2). **Gain Selection with Digital Outputs.** Digital Outputs of a DAQ (data acquisition device) select gains with TTL/CMOS logic levels.





Array Elements for Underwater Linear and Planar Arrays

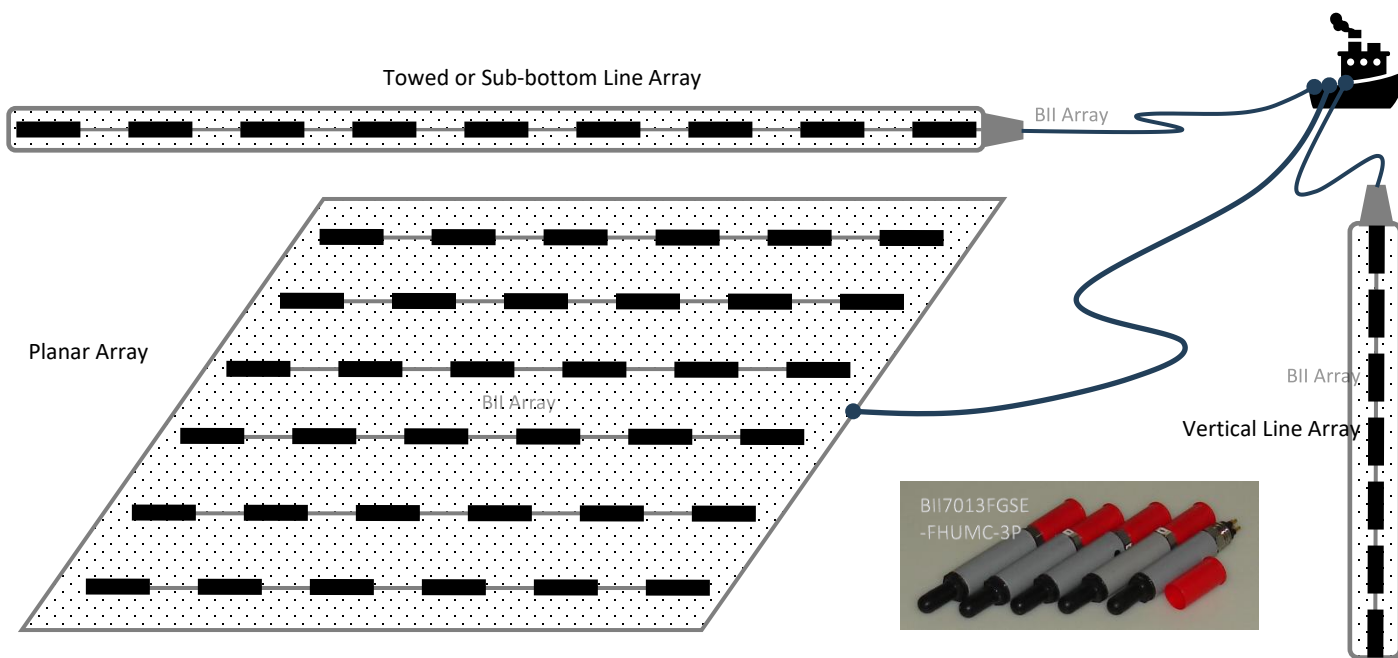


Simple Array Consisting of Hydrophones.


"Figure 8" Pattern of a Dipole (Pressure-Gradient).



Cardioid Pattern



Linear Array with BII Discrete Hydrophones



Low Frequency Sounds in the Ocean at 1 Hz to 1 kHz. Low Frequency Sounds between 1Hz to 1kHz undergo little attenuation in ocean and lakes: 1.2×10^{-7} at 1Hz, 0.0002 at 10Hz, 0.0015 at 100Hz, 0.07 at 1kHz, in dB/km, proximately. The major propagation losses are Spreading Loss, Absorption and Scattering at boundaries such as seafloor sediments. The sounds being trapped in deep sound channel or SOFAR channel avoiding losses from both top and bottom boundaries can propagate very big area with very low loss. These low frequency sounds contain valuable information on their sources and propagation areas such as Weathers (Winds, Rains, Surface Waves, Ice, Storms, ...), Geological Process (Earthquakes, Tsunamis, Moving of Tectonic Plates and Crusts,...), Marine Animals (Whales, Dolphins, Fish, Invertebrates, ...), Anthropogenic Activities (Shipping, Harbor, Oil and Wind Energy Extraction, Air Guns, ...). Besides sounds detection or monitoring with deployment at 1000m depth, the distributed hydrophone network in shallow water (at a specific depth) can also be used to detect and monitor upward sounds being refracted from SOFAR channel.